



**Insulated
Wrenches**

INSULATED WRENCHES



Insulated Adjustable Wrench

- Read off scale for jaw opening
- Hardened and tempered alloy steel
- Dip insulation
- Shockproof resin insulation
- Not recommended for working on live parts

Description	Order No.	Opening	Length	Weight
Adjustable wrench	1519 04	0 – 13 mm	110 mm	140 g
	1519 06	0 – 20 mm	130 mm	190 g
	1519 08	0 – 27 mm	210 mm	260 g
	1519 10	0 – 30 mm	260 mm	400 g
	1519 12	0 – 34 mm	310 mm	870 g
	1519 15	0 – 44 mm	360 mm	1230 g
	1519 18	0 – 53 mm	450 mm	1900 g



Insulated Open-End Wrench

- Hardened and tempered alloy steel
- Dip insulation
- Shockproof resin insulation



Description	Order No.	Size	Length	Weight
Open-End Wrench	1513 06	6	76 mm	20 g
	1513 07	7	82 mm	20 g
	1513 08	8	96 mm	20 g
	1513 09	9	105 mm	24 g
	1513 10	10	110 mm	29 g
	1513 11	11	115 mm	33 g
	1513 12	12	130 mm	44 g
	1513 13	13	137 mm	48 g
	1513 14	14	140 mm	54 g
	1513 15	15	150 mm	58 g
	1513 16	16	160 mm	70 g
	1513 17	17	161 mm	84 g
	1513 18	18	163 mm	100 g
	1513 19	19	175 mm	105 g
	1513 20	20	172 mm	149 g
	1513 21	21	200 mm	159 g
	1513 22	22	200 mm	192 g
	1513 24	24	220 mm	242 g
	1513 27	27	242 mm	322 g
	1513 30	30	285 mm	343 g
1513 32	32	280 mm	500 g	
1513 34	34	280 mm	500 g	
1513 36	36	310 mm	575 g	



INSULATED WRENCHES

Insulated 12-Point Wrench

- Hardened and tempered alloy steel
- Dip insulation
- Shockproof resin insulation



Description	Order No.	Ⓣ Size	Length	Weight
12-point wrench	1613 06	6	146 mm	41 g
	1613 07	7	151 mm	50 g
	1613 08	8	159 mm	62 g
	1613 09	9	157 mm	68 g
	1613 10	10	179 mm	84 g
	1613 11	11	183 mm	90 g
	1613 12	12	195 mm	106 g
	1613 13	13	188 mm	113 g
	1613 14	14	197 mm	135 g
	1613 15	15	191 mm	160 g
	1613 16	16	218 mm	175 g
	1613 17	17	204 mm	205 g
	1613 18	18	236 mm	227 g
	1613 19	19	240 mm	296 g
	1613 20	20	250 mm	300 g
	1613 21	21	264 mm	305 g
	1613 22	22	255 mm	308 g
	1613 24	24	268 mm	422 g
	1613 27	27	290 mm	455 g
	1613 30	30	272 mm	561 g
1613 32	32	317 mm	646 g	
1613 34	34	322 mm	1060 g	
1613 36	36	306 mm	1060 g	



Insulated 90° Bent 12-Point Wrench

- Hardened and tempered alloy steel
- Dip insulation
- Shockproof resin insulation
- For nuts placed in hard-to-get-at positions



Description	Order No.	Ⓣ Size	Dimensions	Weight
90° bent 12-point wrench	1614 10	10	70 x 190 mm	100 g
	1614 12	12	70 x 195 mm	100 g
	1614 13	13	70 x 215 mm	180 g
	1614 14	14	80 x 245 mm	220 g
	1614 17	17	90 x 245 mm	240 g
	1614 18	18	90 x 245 mm	240 g
	1614 19	19	95 x 245 mm	240 g
	1614 20	20	100 x 250 mm	280 g
	1614 22	22	100 x 250 mm	280 g
	1614 24	24	100 x 250 mm	280 g
	1614 30	30	110 x 260 mm	470 g



INSULATED WRENCHES

Insulated Hex Socket T Wrench

- 200 mm Shank length
- Hardened and tempered alloy steel
- Dip insulation
- Shockproof resin insulation



Description	Order No.	Ⓢ Size	Dimensions	Weight
Hex socket T wrench 200 mm Shank length	1374 10	10	160 x 200 mm	310 g
	1374 11	11	160 x 200 mm	330 g
	1374 12	12	160 x 200 mm	350 g
	1374 13	13	160 x 200 mm	360 g
	1374 14	14	160 x 200 mm	440 g
	1374 16	16	160 x 200 mm	450 g
	1374 17	17	160 x 200 mm	450 g
	1374 18	18	160 x 200 mm	470 g
	1374 19	19	160 x 200 mm	510 g
	1374 20	20	160 x 200 mm	510 g
	1374 22	22	160 x 200 mm	520 g
	1374 24	24	160 x 200 mm	540 g



Insulated Hex Socket T Wrench Long

- 300 mm Shank length
- Hardened and tempered alloy steel
- Dip insulation
- Shockproof resin insulation



Description	Order No.	Ⓢ Size	Dimensions	Weight
Hex socket T wrench 300 mm Shank length	1384 10	10	160 x 300 mm	370 g
	1384 11	11	160 x 300 mm	380 g
	1384 12	12	160 x 300 mm	400 g
	1384 13	13	160 x 300 mm	420 g
	1384 14	14	160 x 300 mm	470 g
	1384 16	16	160 x 300 mm	520 g
	1384 17	17	160 x 300 mm	520 g
	1384 18	18	160 x 300 mm	560 g
	1384 19	19	160 x 300 mm	560 g
	1384 20	20	160 x 300 mm	600 g
	1384 22	22	160 x 300 mm	600 g
	1384 24	24	160 x 300 mm	660 g



Insulated Cross Wrench


- Hardened and tempered alloy steel
- Dip insulation
- Shockproof resin insulation



Description	Order No.	Ⓢ Size	Dimensions	Weight
Cross wrench	1214 01	10 11 14 17	140 x 140 mm	220 g
	1214 02	10 12 14 17	140 x 140 mm	220 g
	1214 03	11 12 13 17	140 x 140 mm	220 g
	1214 04	10 13 14 17	140 x 140 mm	230 g
	1214 05	11 13 14 17	140 x 140 mm	230 g
	1214 06	13 17 19 22	140 x 140 mm	340 g
	1214 07	14 17 19 22	140 x 140 mm	360 g
	1214 08	10 11 12 13	140 x 140 mm	200 g
	1214 09	10 11 13 17	140 x 140 mm	220 g



INSULATED WRENCHES

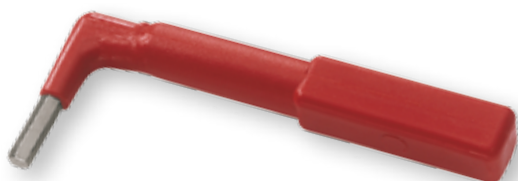

Insulated 90° Hex Wrench

- Hardened and tempered alloy steel
- Shockproof resin insulation

Description	Order No.	⊗ Size	Dimensions	Weight
90° hex wrench	1163 25	2,5	35 x 104 mm	30 g
	1163 03	3	35 x 104 mm	31 g
	1163 04	4	35 x 104 mm	34 g
	1163 05	5	35 x 106 mm	36 g
	1163 06	6	40 x 110 mm	46 g
	1163 08	8	45 x 120 mm	80 g
	1163 10	10	50 x 120 mm	125 g



Insulated 90° Hex Wrench Heavy Duty

- Hardened and tempered alloy steel
- Shockproof resin insulation

Description	Order No.	⊗ Size	Dimensions	Weight
90° hex wrench heavy duty	1165 05	5	35 x 150 mm	75 g
	1165 06	6	40 x 150 mm	88 g



Insulated Hex T Wrench Light-Weight

- Hardened and tempered alloy steel
- Shockproof resin insulation

Description	Order No.	⊗ Size	Dimensions	Weight
Hex T wrench Light-weight	1173 25	2,5	95 x 115 mm	80 g
	1173 03	3	95 x 115 mm	80 g
	1173 04	4	95 x 115 mm	80 g
	1173 05	5	95 x 115 mm	80 g
	1173 06	6	95 x 115 mm	90 g



Insulated Hex T Wrench Heavy Duty

- Hardened and tempered alloy steel
- Shockproof resin insulation

Description	Order No.	⊗ Size	Dimensions	Weight
Hex T wrench Heavy duty	1175 04	4	95 x 160 mm	105 g
	1175 05	5	95 x 160 mm	105 g
	1175 06	6	95 x 160 mm	110 g
	1175 08	8	95 x 160 mm	115 g
	1175 10	10	95 x 160 mm	120 g
	1175 13	13	95 x 160 mm	145 g

INSULATED WRENCHES



1000V
IEC 60900

Insulated Hex T Wrench Small

- Hardened and tempered alloy steel
- Shockproof resin insulation

Description	Order No.	Ⓜ Size	Dimensions	Weight
Hex T wrench Small	1179 73	5	70 x 120 mm	80 g



1000V
IEC 60900

Insulated Hex T Wrench Long

- Hardened and tempered alloy steel
- Shockproof resin insulation

Description	Order No.	Ⓜ Size	Dimensions	Weight
Hex T wrench Long	1179 72	5	90 x 200 mm	105 g
	1179 70	6	90 x 200 mm	105 g



1000V
IEC 60900

Insulated Hex T Wrench Extra Long

- Hardened and tempered alloy steel
- Shockproof resin insulation

Description	Order No.	Ⓜ Size	Dimensions	Weight
Hex T wrench Extra Long	1173 35	5	90 x 240 mm	100 g
	1173 36	6	90 x 240 mm	115 g
	1173 38	8	90 x 240 mm	130 g
	1173 31	10	90 x 240 mm	115 g

intercable

NARZĘDZIA DLA PROFESJONALISTÓW

CUTTING & CRIMPING 12



Intercable srl
Via Campi della Rienza, 21
I-39031 Brunico – ITALY
Tel. +39 0474 - 571700
Fax +39 0474 - 555511
export@intercable.it
www.intercable.eu

Intercable w Polsce
ul. Poznańska 275a
PL - 88-100 Inowrocław
Tel. +48 52 35 37 200
Fax +48 52 35 49 541
biuro@intercable.pl
www.intercable.pl

Intercable nie ponosi odpowiedzialności za szkody wynikające z niewłaściwego użytkowania lub eksploatacji produktów przedstawionych w niniejszym katalogu. Ponadto Intercable zastrzega sobie prawo do zmiany produktów w niniejszym katalogu bez uprzedzenia.